

OIL MINDER® LIQUIDATOR®

PACKAGED SYSTEM SEPARATES WATER AND HYDROCARBONS WITHOUT INTERRUPTION

Stancor's implementation of proprietary sensing technology into a modular system offers elevator sump pumps an unmatched combination of reliability, ease of installation and configuration flexibility. Liquidator systems separate water and hydrocarbons, without interruption, to meet interpretations of ASME 17.1 2.2.2.5 requirements to remove all liquids from sump pits.

Two system designs, which are described on the back page, are available to provide a low-cost and space-efficient alternative to traditional oil/water separators.

Additional features can be added to meet specific application needs. Stancor offers vertical floats to operate reliably in constrained space, junction boxes to simplify installation, additional performance commands to expand maintenance programs and a seamless BACnet integration for BMS connectivity.




STANCOR™

Pump & Control Solutions

BUILDING TRADES | CONSTRUCTION | MINING | UTILITIES | WASTEWATER

VALVE LIQUIDATOR SYSTEM

The Simplex, or single-pump, Liquidator features dual solenoid valves that route liquid based on Stancor's reliable sensor technology. Water is diverted to storm or sewer, depending on code requirements, and hydrocarbons are sent to designated containment. A wide range of pump options are available to specify the right configuration to meet interpretations to ASME 17.1 2.2.2.5 requirements.

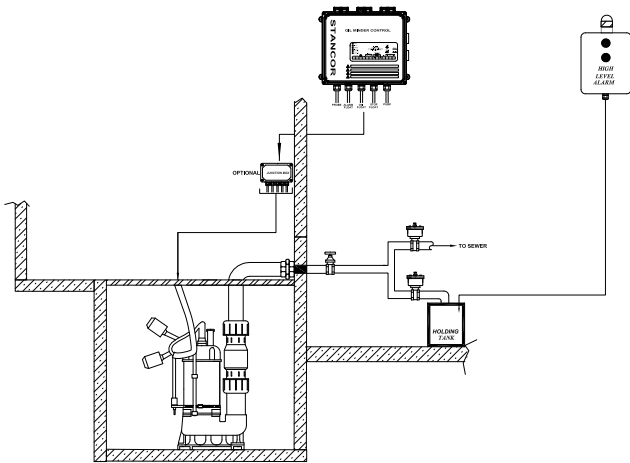


PN	HP	Voltage	Phase
OM50JB/ELV/VALVE/Liquidator	0.5	115/208/460	1,3
OM100JB/ELV/VALVE/Liquidator	1.0	115/208/460	1,3
OM200JB/ELV/VALVE/Liquidator	2.0	208/230/460	1,3
OM300JB/ELV/VALVE/Liquidator	3.0	230/460	3

Available either direct wired (DW) or with a junction box (JB).

DUPLEX LIQUIDATOR SYSTEM

The Duplex system features one pump dedicated to pumping water to sewer or storm and one pump dedicated to pumping hydrocarbons to onsite containment. This configuration of Stancor's oil/water diversion system maximizes liquid separation. The Control Panel is programmed to activate either the water or hydrocarbon pump based on conductivity measured by the probe.

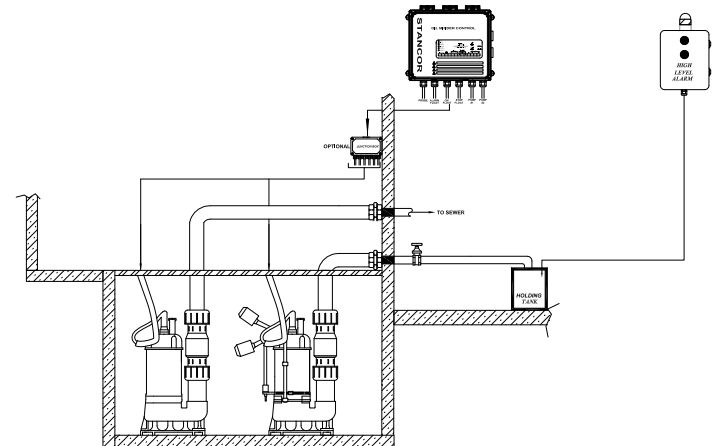

PN	HP	Voltage	Phase
OM50JB/ELV/Liquidator2	0.5	115/208/460	1,3
OM100JB/ELV/Liquidator2	1.0	115/208/460	1,3
OM200JB/ELV/Liquidator2	2.0	208/230/460	1,3
OM300JB/ELV/Liquidator2	3.0	230/460	3

Available either direct wired (DW) or with a junction box (JB).

Please consult with a Stancor authorized distributor to learn the benefits of specifying Oil Minder Liquidator systems. To find a distributor, or for technical questions, contact Stancor at **203-268-7513** or via email at **office@stancorpumps.com**.